





DAVIS WIRE

RANCH HAND
GOLD BRAND
SILVERADO
GALFAN

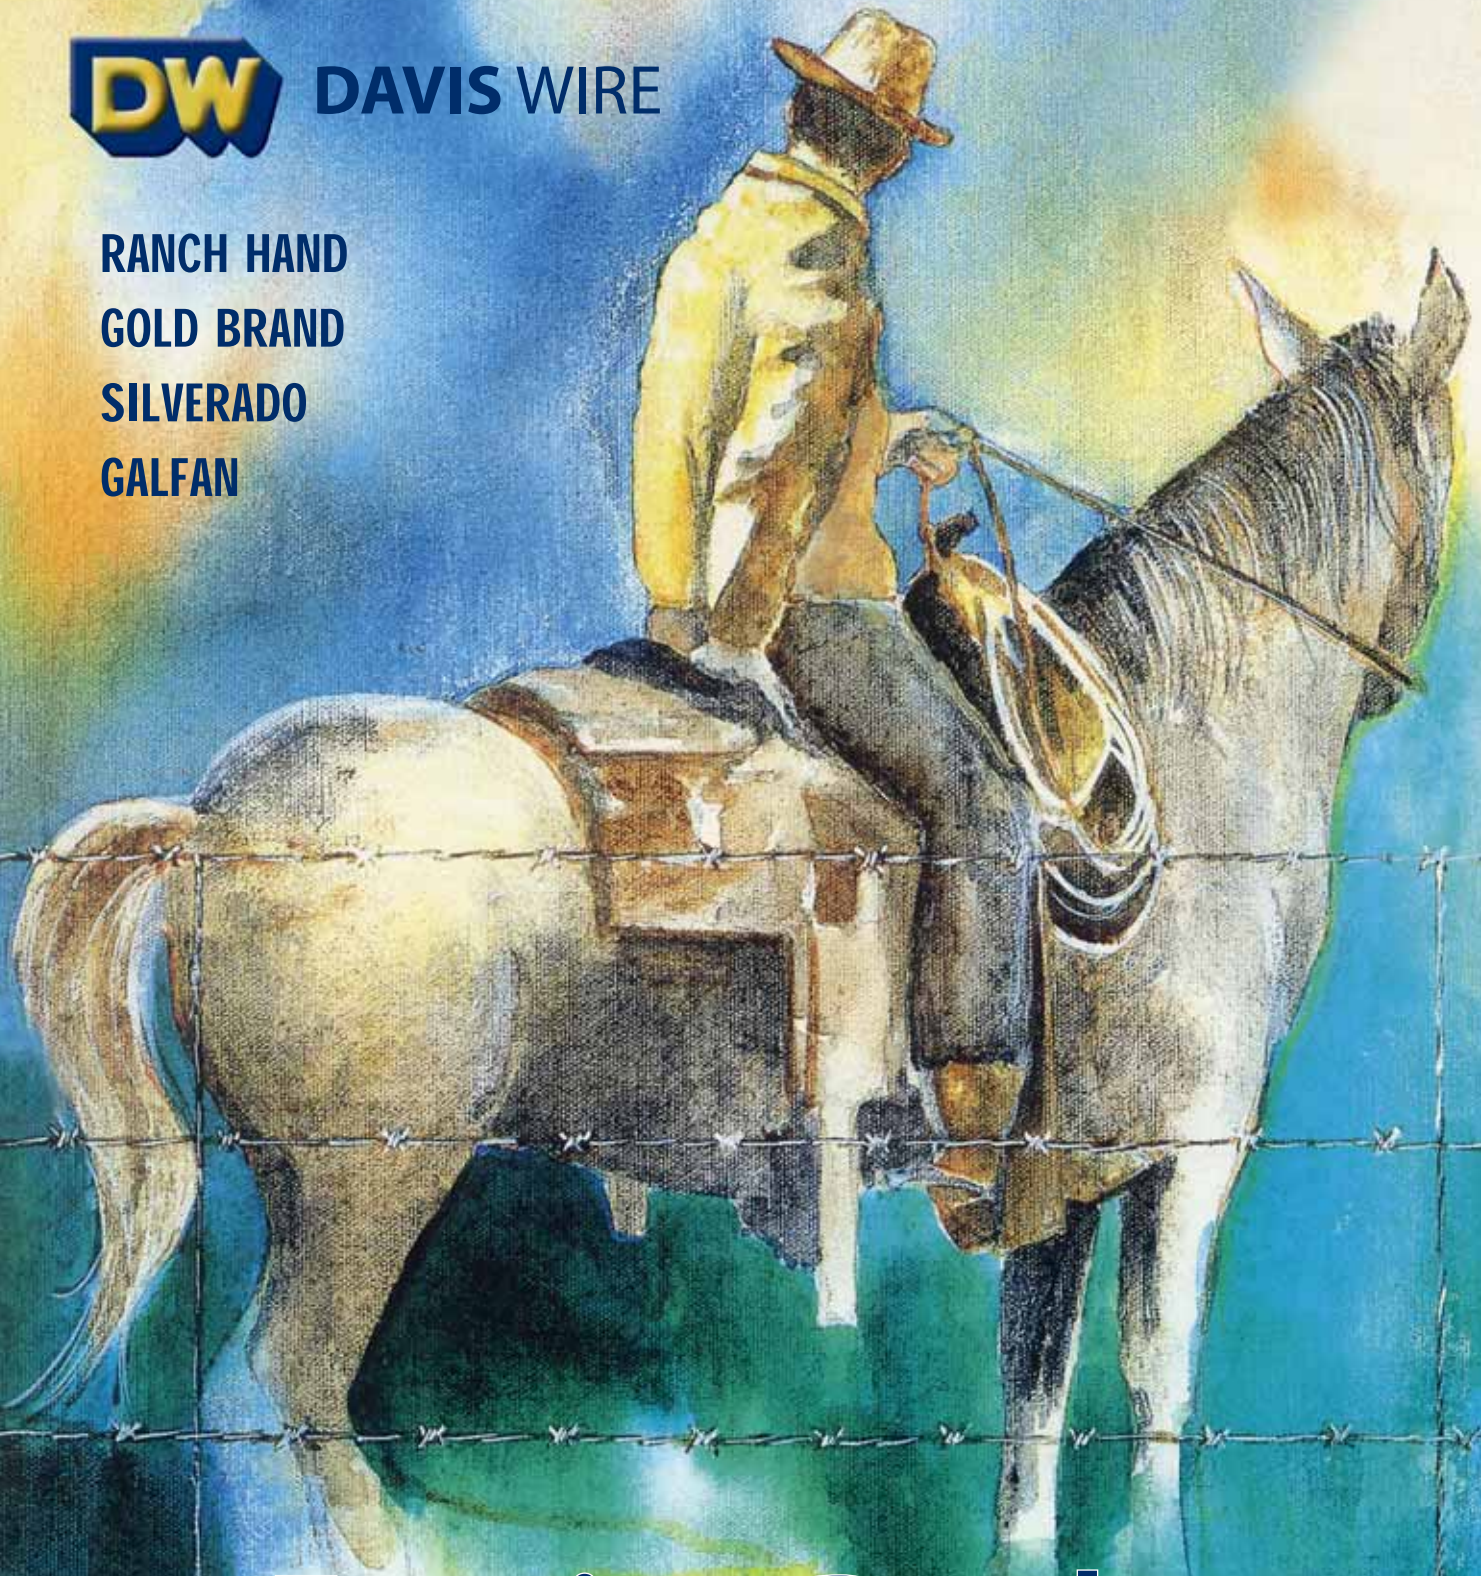

Fencing Products

Ranch, Home and Garden

Made in the USA 

Field Fencing




Hinge Joint Field Fence

The flexible hinge joint knot gives our woven field fence its unique ability to spring back into shape. Heavy livestock, falling trees, limbs, and fence jumping animals like deer make this fence the rancher's first choice. Vertical wires are individually cut and wrapped for maximum strength and flexibility. Davis Wire field fence is manufactured from galvanized steel wire with a Commercial, Class III or Galfan coating.



RANCH HAND

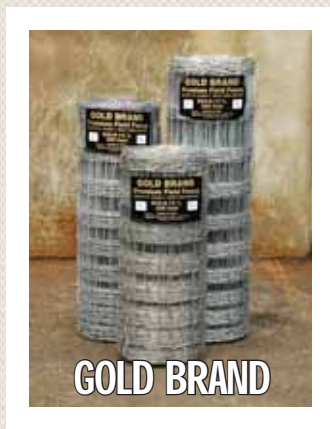

GOLD BRAND



GALFAN

Style	Weight	Height	Hrztl Wire	Stay Spacing	Gauge	Top Wire Gauge	Length	Rolls/Pallet
726-6-12 $\frac{1}{2}$	128 lbs.	26"	7	6	12 $\frac{1}{2}$	10	330'	9
832-6-12 $\frac{1}{2}$	148 lbs.	32"	8	6	12 $\frac{1}{2}$	10	330'	9
*939-6-12 $\frac{1}{2}$	168 lbs.	39"	9	6	12 $\frac{1}{2}$	10	330'	9
*1047-6-12 $\frac{1}{2}$	190 lbs.	47"	10	6	12 $\frac{1}{2}$	10	330'	9
1155-6-12 $\frac{1}{2}$	215 lbs.	55"	11	6	12 $\frac{1}{2}$	10	330'	9

*100' rolls available




SILVERADO



Stiff Stay Field Fence

The stiff stay knot keeps its shape over hilly ground. Tough, sturdy construction stands up to impact from large animals without buckling or sagging. One piece vertical stay wires are tied to line wires and crimped at the joints to prevent slippage.

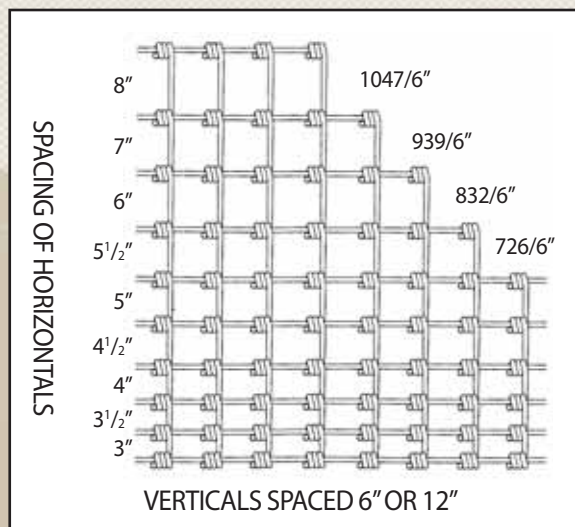

Hi-Tensile Field Fence

Grizzly field fence is a lighter weight, higher tensile version of our hinge joint field fence. Hi-tensile fencing is ideal where access is difficult or where installation costs are critical. This very economical fence doesn't compromise strength and saves you money on your overall fencing costs. Additionally, its Class III zinc coating will provide a longer lasting fence.



GRIZZLY

Style	Weight	Height	Hrztl Wire	Stay Spacing	Gauge	Top Wire Gauge	Length	Rolls/Pallet
939-6-14 $\frac{1}{2}$	107 lbs.	39"	9	6	14 $\frac{1}{2}$	12 $\frac{1}{2}$	330'	9
1047-6-14 $\frac{1}{2}$	122 lbs.	47"	10	6	14 $\frac{1}{2}$	12 $\frac{1}{2}$	330'	9

Horse Fence / Deer & Rabbit Fence



RANCH HAND
Stablemesh



GOLD BRAND
Stablemesh



GALVAN
Stablemesh



Non-Climb Stablemesh

Traditional stablemesh at its best. Sturdy 12-1/2 gauge wire in 36", 48", 60" and 72" heights. Tied Stiff Stay knot is smooth on both sides to protect animals while keeping the fence rigid. Special 4"x2" mesh keeps hooves out and prevents climbing.

Style*	Weight	Height	Spacing	Gauge	Length	Rolls/Pallet
1036-2-12 ¹ / ₂	96	36"	4x2	12 ¹ / ₂	100'	8
1348-2-12 ¹ / ₂	122	48"	4x2	12 ¹ / ₂	100'	8
1660-2-12 ¹ / ₂	151	60"	4x2	12 ¹ / ₂	100'	8
1972-2-12 ¹ / ₂	179	72"	4x2	12 ¹ / ₂	100'	8

*200' rolls available on request

V-Mesh Fence

The choice of professionals when they care for their own horses. Unique, 2-inch and 4-inch mesh spread incorporates 12-1/2 gauge, 2-ply, twisted horizontal cables with 14 gauge looped cross wires that create a dense, protective fence. This is one tough fence and galvanized to stand up to years of use and abuse, from frisky foals and cantankerous mustangs, alike.

Style	Height	Approx. Weight Per/Roll	Horizontal Wire Gauge	Cross Wire Gauge	Length	Rolls per Pallet
I-2	42"	214	12 ¹ / ₂	14	165'	4
I-2	50"	256	12 ¹ / ₂	14	165'	4
I-2	58"	298	12 ¹ / ₂	14	165'	4
I-2	72"	361	12 ¹ / ₂	14	165'	4

All horizontal wires are 2-ply cable.



Deer & Rabbit Fence

The perfect fence for keeping large and small animals out of gardens, orchards, vineyards, etc. Heavy duty fence with stiff stay knot for durability.

Style	Weight	Height	Horz. Wire	Stay Spacing	Gauge	Length	Rolls/Pallet
2048-2-14 ¹ / ₂	85	48"	20	6	14 ¹ / ₂	165'	14
2360-2-14 ¹ / ₂	99	60"	23	6	14 ¹ / ₂	165'	14
2672-2-14 ¹ / ₂	114	72"	26	6	14 ¹ / ₂	165'	14



RANCH HAND

Barbed & Barbless Wire / Fence Stays



Ranch Hand is available in 2 pt. 5", 4 pt. 5" and barbless and made of galvanized steel to endure the tests of time and weather.

Gold Brand Class III designates our premium quality wire. Gold Brand meets or exceeds all ASTM A121 specifications. It is also available in 2 pt., 4 pt., and barbless styles.

Galfan coated wire is manufactured to withstand the extreme conditions of climate and used where corrosion resistance is imperative. Galfan provides a longer corrosion life and lower cost per year of service life.

Barbless wire has a variety of uses from fencing in horses to putting tension wire at the bottom of our field fence. It is designed to enclose thinner skinned animals and do the job without the severity of barbed wire.

Whether its 2 point or 4 point barbed wire, the durability and strength will impress every user of our wire. Because we have some of the sharpest barbs in the industry, it is preferred by ranchers everywhere.

Ranch Hand

No. of Barbs	Barb Spacing	Approx. Wt. Per/Reel	Gauge	Length	Rolls per Pallet
2 pt.	5"	76	12½	1320'	32
4 pt.	5"	83	12½	1320'	27
Barbless	n/a	68	12½	1320'	32

Gold Brand & Galfan

No. of Barbs	Barb Spacing	Approx. Wt. Per/Reel	Gauge	Length	Rolls per Pallet
2 pt.	4"	78	12½	1320'	32
4 pt.	5"	85	12½	1320'	27
Barbless	n/a	70	12½	1320'	32

DW Commercial

No. of Barbs	Barb Spacing	Approx. Wt. Per/Reel	Gauge	Length	Rolls per Pallet
2 pt.	5"	62	13	1320'	32



Fence Stays

Fence Stays help maintain stability and uniformity in fencing when used with barbed and barbless wire or a combination of barbed wire and field fence. Available in Ranch Hand, Gold Brand or Galfan coatings.

Length	Weight	Quantity/Bundle	Gauge	Bdls/Pallet
36"	35 / bdl	100 / bdl	9.5	20
42"	41 / bdl	100 / bdl	9.5	20
48"	47 / bdl	100 / bdl	9.5	20

Welded GP Fabric / Panels / Ornamental Fence

Welded General Purpose Fabric

This galvanized welded fabric is a versatile product for all types of farm, home and industrial applications. Available in 50' and 100' lengths, 12-1/2 or 14 gauge.



Mesh Space	Height	Weight	Gauge	Length	Rolls/Pallet
4x2	36"	72	12 1/2	100'	8
4x2	48"	96	12 1/2	100'	8
4x2	60"	119	12 1/2	100'	8
4x2	72"	141	12 1/2	100'	8
4x2	36"	48	14	100'	9
4x2	48"	64	14	100'	9
4x2	60"	80	14	100'	9
4x2	72"	96	14	100'	9
4x2	36"	24	14	50'	14
4x2	48"	32	14	50'	14
4x2	60"	40	14	50'	14
4x2	72"	48	14	50'	14

Welded Fence Panels

Davis Wire Welded Fence Panels are manufactured in a wide variety of horizontal spacing configurations. They are built to handle the roughest ranching conditions, but are versatile enough to be used for lawn and garden projects. Our panels are manufactured using the galvanized welding process, which provides a smooth finish to each line wire and eliminates sharp burrs which may cause injury to the animal or their owner. Whether used for cattle, swine, sheep goats, or horses, Davis Wire Welded Fence Panels are tough enough to handle any fencing requirements.



Style	Height	Length	# of Lines	Weight
1134-8 Hog Panel	34"	16'	11	33
1142-8 Sheep Panel	42"	16'	11	36
1052-8 Ranch Panel	52"	16'	10	36
1050-8 Ranch Panel	50"	16'	10	36
1352-8 Econo Panel	52"	16'	13	42
1350-8 Econo Panel	50"	16'	13	42
4x4 5'x 16' Utility Panel	60"	16'	16	68
4x4 3'x 16' Utility Panel	36"	16'	10	29

Ornamental Fence, 100' Rolls

An old favorite, this CF&I Brand Class I galvanized wire fencing dresses up the yard or garden and helps keep out pests. Specification A-11 (Double Loop) fence has closely woven picket wires at the bottom, and double-loop wires that prevent climbing. Three heights, 36", 42" and 48", keep children, pets and ranch animals where they belong.



CF & I Brand	Picket Wire Gauge	Spacing Top/Btm	Ht.	Wt./Roll	Rolls/Pallet
Specification A-11	11 Gauge	2-7/8 x 1-3/8"	36"	124 lbs.	9
Specification A-11	11 Gauge	2-7/8 x 1-3/8"	42"	135 lbs.	9
Specification A-11	11 Gauge	2-7/8 x 1-3/8"	48"	158 lbs.	9
Specification B-11	11 Gauge	2-7/8" entire length	36"	97 lbs.	9
Specification B-11	11 Gauge	2-7/8" entire length	42"	108 lbs.	9
Specification B-11	11 Gauge	2-7/8" entire length	48"	122 lbs.	9
Flower Bed Border	11 Gauge	2-3/4"	16"	49 lbs.	18
Flower Bed Border	11 Gauge	2-3/4"	22"	62 lbs.	16

Vineyard, Trellis & Fence Wire / Baler Wire



Hi-Tensile Vineyard, Trellis & Fence Wire

For wine as well as fruit orchards. Both standard (58,000 - 70,000 psi) and hi-tensile (170,000 psi) to choose from. Available in Type 1, Class III and Galvan coatings, 100# coils or 1500# stands, 12, 12-1/2, 13 and 14 gauge.

Hi-Tensile Smooth Wire

Hi-tensile smooth wire provides an innovative choice for enclosing wide open spaces. Hi-tensile DW200 (200,000 psi) wire is ideally suited for electric fence. The Class III and Galvan coatings give years of extra service as well as a pleasant appearance. Available in 100 pound, 12-1/2 gauge, layer wound coils.

Merchant Wire Coils

Merchant wire coils are ideal for all-purpose tying around the farm and home. Available in 9 to 16 gauge, annealed or galvanized coatings. Merchant wire is produced in 10 lb. and 50 lb. coils.

Gauge	Decimal	Ft./Lb.	Gauge	Decimal	Ft./Lb.	Gauge	Decimal	Ft./Lb.	Gauge	Decimal	Ft./Lb.
1	.283	4.681	5	.207	8.750	9	.1483	17.05	13	.0915	44.78
1 ¹ / ₄	.278	4.851	5 ¹ / ₄	.203	9.098	9 ¹ / ₄	.145	17.83	13 ¹ / ₄	.089	47.33
1 ¹ / ₂	.273	5.030	5 ¹ / ₂	.200	9.373	9 ¹ / ₂	.142	18.57	13 ¹ / ₂	.086	50.59
1 ³ / ₄	.268	5.220	5 ³ / ₄	.196	9.759	9 ³ / ₄	.138	19.69	13 ³ / ₄	.083	54.42
2	.2625	5.441	6	.192	10.17	10	.135	20.57	14	.080	58.58
2 ¹ / ₄	.258	5.632	6 ¹ / ₄	.188	10.81	10 ¹ / ₄	.131	21.85	14 ¹ / ₄	.078	61.62
2 ¹ / ₂	.253	5.857	6 ¹ / ₂	.185	10.95	10 ¹ / ₂	.128	22.88	14 ¹ / ₂	.076	64.91
2 ³ / ₄	.248	6.096	6 ³ / ₄	.181	11.44	10 ³ / ₄	.124	24.38	14 ³ / ₄	.074	68.46
3	.2437	6.313	7	.177	11.97	11	.1205	25.82	15	.072	72.32
3 ¹ / ₄	.239	6.563	7 ¹ / ₄	.173	12.53	11 ¹ / ₄	.117	27.39	15 ¹ / ₄	.070	76.51
3 ¹ / ₂	.235	6.789	7 ¹ / ₂	.170	12.97	11 ¹ / ₂	.113	29.36	15 ¹ / ₂	.067	83.52
3 ³ / ₄	.230	7.087	7 ³ / ₄	.166	13.61	11 ³ / ₄	.109	31.55	15 ³ / ₄	.065	88.73
4	.2253	7.386	8	.162	14.29	12	.1055	33.69	16	.0625	95.98
4 ¹ / ₄	.221	7.676	8 ¹ / ₄	.159	14.83	12 ¹ / ₄	.102	36.03	16 ¹ / ₄	.060	104.1
4 ¹ / ₂	.216	8.035	8 ¹ / ₂	.155	15.60	12 ¹ / ₂	.099	38.25	16 ¹ / ₂	.058	111.4
4 ³ / ₄	.212	8.341	8 ³ / ₄	.152	16.23	12 ³ / ₄	.095	41.54	16 ³ / ₄	.056	119.8



Baler Wire Cartons

Davis Wire Baler Wire is made from a special grade of high quality steel. The closely controlled annealing process assures consistent break and elongation qualities that provide for production of maximum weight hay bales. The combination of uniform layer wound coiling and the application of special lubricant provides a tangle-free, rust-resistant package. The coils are securely fastened with nylon tape and placed in a water-resistant carton with perforated center knock-out for easy dispensing.

Specification: Meets ASAE Standard Specs, No. 6500 Coil

Wire Gauge: 14-1/2 Inside Diameter: 8" Length: 6500 ft.
 Width: 6" Outside Diameter: 13" Packaging: 36 cartons/pallet



Davis Wire Corporation offers the **Ranch Hand Brand** and **Silverado** as standard product lines. This top quality line of products is priced at competitive levels in the marketplace. These fencing products are available to service most of your agricultural or lawn and garden applications. Although the **Ranch Hand** and **Silverado** labels denote the basic and most significant portion of our product line, we offer additional higher qualities to meet your specific needs.

The **Gold Brand** label designates a class 3 zinc coating. **Gold Brand** meets ASTM specifications for certified fence projects.

Galfan would be used for applications that require maximum corrosion protection. **Galfan** is a 95% zinc/5% aluminum mischmetal alloy. **Galfan** provides a longer corrosion life and a lower cost per year of service life.



DAVIS WIRE
CORPORATION

QUALITY AGRICULTURAL
WIRE PRODUCTS

19411 80TH AVE. S.
KENT, WA 98032
800.872.8920

5555 N. IRWINDALE AVE.
IRWINDALE, CA 91706
800.350.7851