





DAVIS WIRE

RANCH HAND  
GOLD BRAND  
SILVERADO  
GALFAN

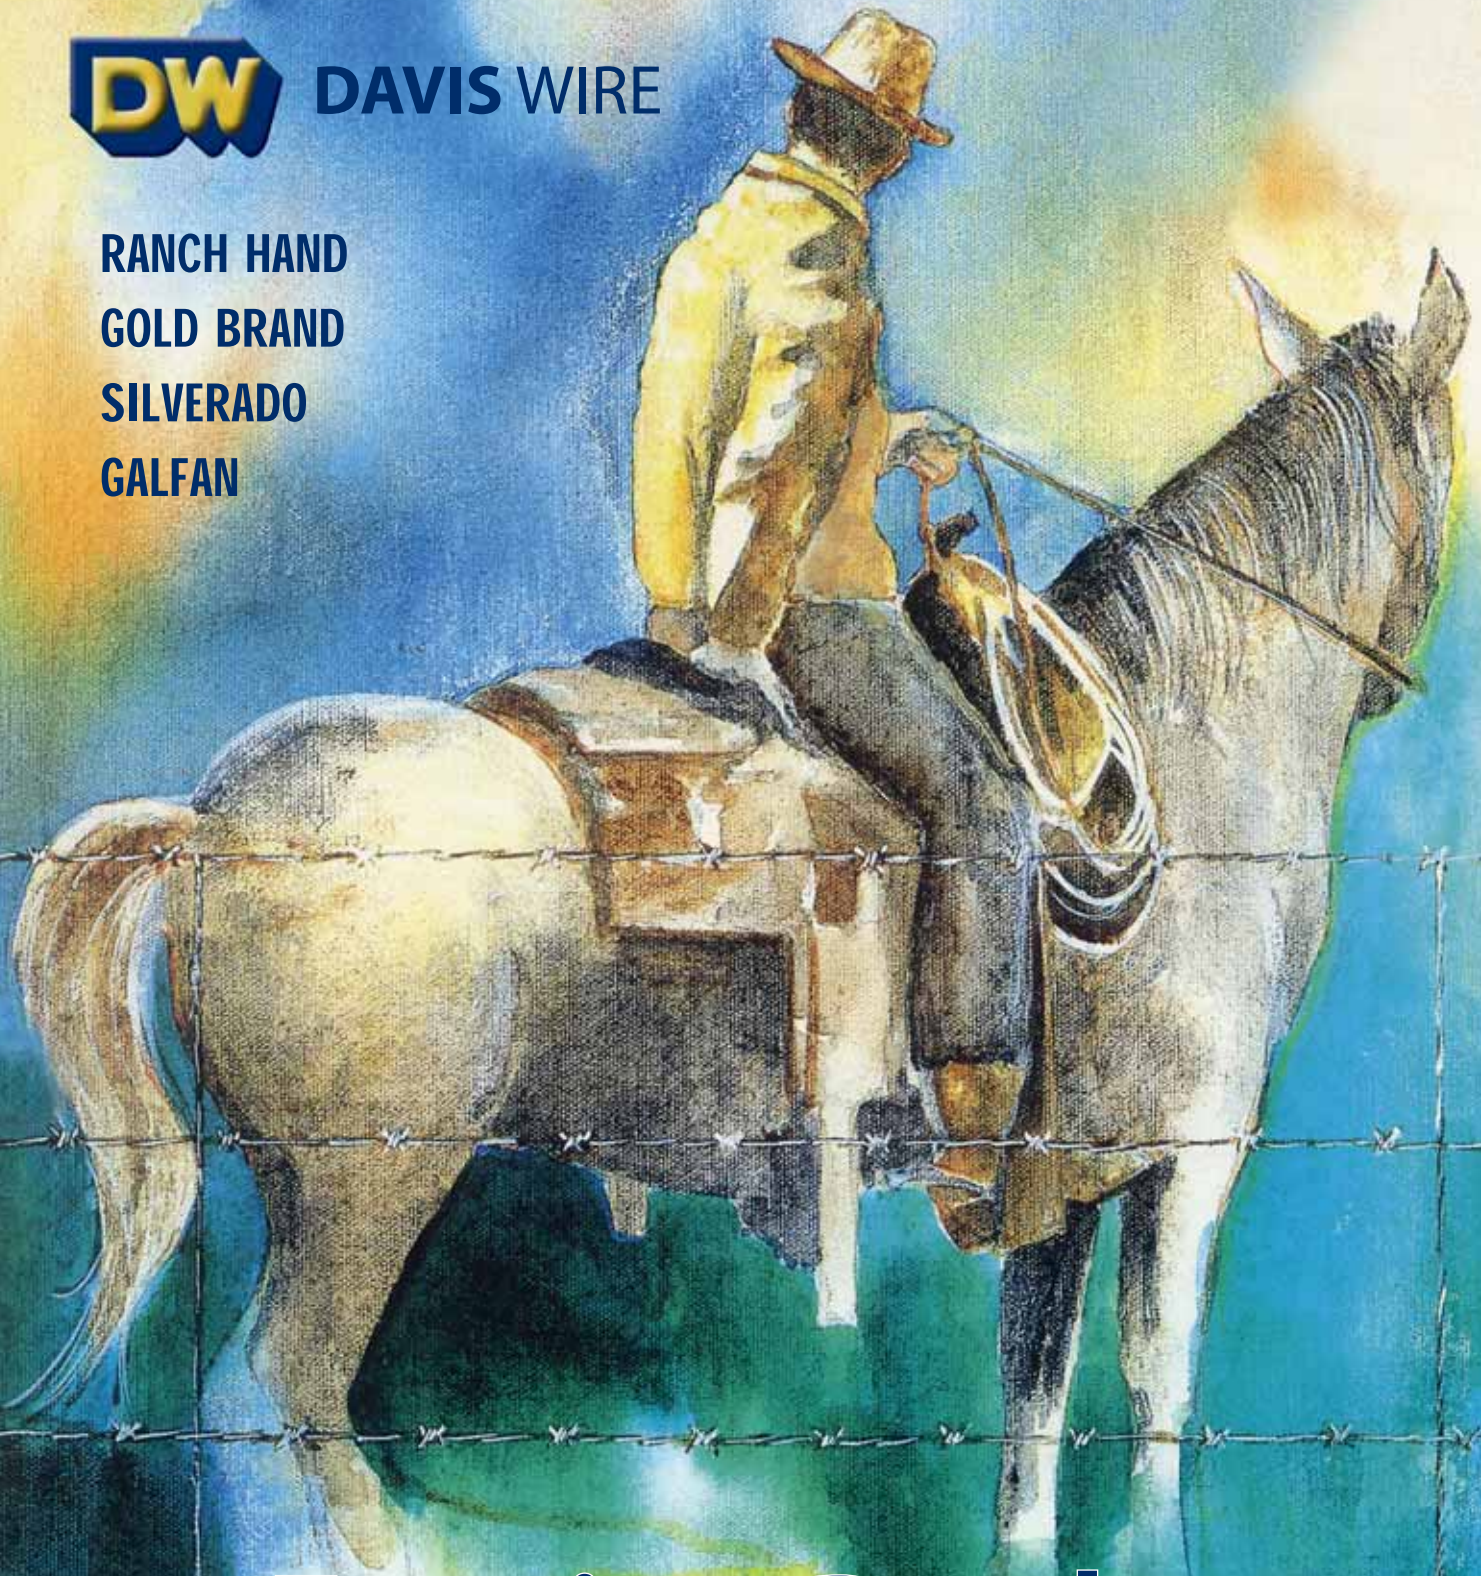

# Fencing Products

Ranch, Home and Garden

Made in the USA 

# Field Fencing




## Hinge Joint Field Fence

The flexible hinge joint knot gives our woven field fence its unique ability to spring back into shape. Heavy livestock, falling trees, limbs, and fence jumping animals like deer make this fence the rancher's first choice. Vertical wires are individually cut and wrapped for maximum strength and flexibility. Davis Wire field fence is manufactured from galvanized steel wire with a Commercial, Class III or Galfan coating.



**RANCH HAND**

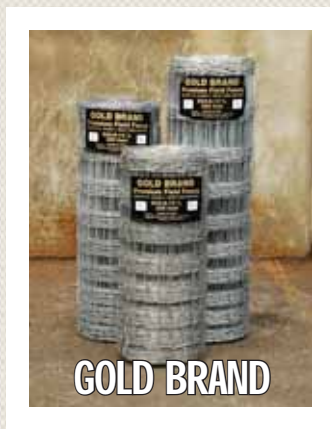

**GOLD BRAND**



**GALFAN**

| Style                    | Weight   | Height | Hrztl Wire | Stay Spacing | Gauge            | Top Wire Gauge | Length | Rolls/Pallet |
|--------------------------|----------|--------|------------|--------------|------------------|----------------|--------|--------------|
| 726-6-12 $\frac{1}{2}$   | 128 lbs. | 26"    | 7          | 6            | 12 $\frac{1}{2}$ | 10             | 330'   | 9            |
| 832-6-12 $\frac{1}{2}$   | 148 lbs. | 32"    | 8          | 6            | 12 $\frac{1}{2}$ | 10             | 330'   | 9            |
| *939-6-12 $\frac{1}{2}$  | 168 lbs. | 39"    | 9          | 6            | 12 $\frac{1}{2}$ | 10             | 330'   | 9            |
| *1047-6-12 $\frac{1}{2}$ | 190 lbs. | 47"    | 10         | 6            | 12 $\frac{1}{2}$ | 10             | 330'   | 9            |
| 1155-6-12 $\frac{1}{2}$  | 215 lbs. | 55"    | 11         | 6            | 12 $\frac{1}{2}$ | 10             | 330'   | 9            |

\*100' rolls available




**SILVERADO**



## Stiff Stay Field Fence

The stiff stay knot keeps its shape over hilly ground. Tough, sturdy construction stands up to impact from large animals without buckling or sagging. One piece vertical stay wires are tied to line wires and crimped at the joints to prevent slippage.

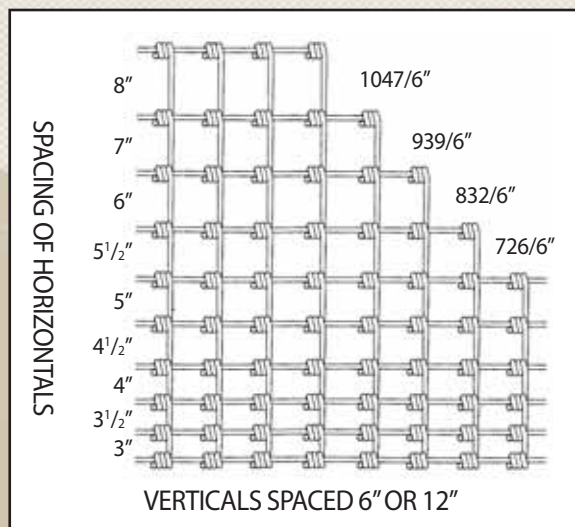

## Hi-Tensile Field Fence

Grizzly field fence is a lighter weight, higher tensile version of our hinge joint field fence. Hi-tensile fencing is ideal where access is difficult or where installation costs are critical. This very economical fence doesn't compromise strength and saves you money on your overall fencing costs. Additionally, its Class III zinc coating will provide a longer lasting fence.



**GRIZZLY**

| Style                   | Weight   | Height | Hrztl Wire | Stay Spacing | Gauge            | Top Wire Gauge   | Length | Rolls/Pallet |
|-------------------------|----------|--------|------------|--------------|------------------|------------------|--------|--------------|
| 939-6-14 $\frac{1}{2}$  | 107 lbs. | 39"    | 9          | 6            | 14 $\frac{1}{2}$ | 12 $\frac{1}{2}$ | 330'   | 9            |
| 1047-6-14 $\frac{1}{2}$ | 122 lbs. | 47"    | 10         | 6            | 14 $\frac{1}{2}$ | 12 $\frac{1}{2}$ | 330'   | 9            |

# Horse Fence / Deer & Rabbit Fence




## Non-Climb Stablemesh

Traditional stablemesh at its best. Sturdy 12-1/2 gauge wire in 36", 48", 60" and 72" heights. Tied Stiff Stay knot is smooth on both sides to protect animals while keeping the fence rigid. Special 4"x2" mesh keeps hooves out and prevents climbing.



**RANCH HAND**  
Stablemesh

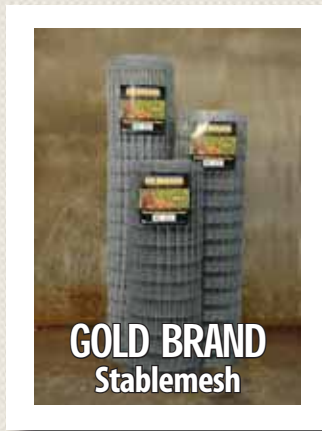

**GOLD BRAND**  
Stablemesh



**GALFAN**  
Stablemesh

| Style*                                | Weight | Height | Spacing | Gauge                          | Length | Rolls/Pallet |
|---------------------------------------|--------|--------|---------|--------------------------------|--------|--------------|
| 1036-2-12 <sup>1</sup> / <sub>2</sub> | 96     | 36"    | 4x2     | 12 <sup>1</sup> / <sub>2</sub> | 100'   | 8            |
| 1348-2-12 <sup>1</sup> / <sub>2</sub> | 122    | 48"    | 4x2     | 12 <sup>1</sup> / <sub>2</sub> | 100'   | 8            |
| 1660-2-12 <sup>1</sup> / <sub>2</sub> | 151    | 60"    | 4x2     | 12 <sup>1</sup> / <sub>2</sub> | 100'   | 8            |
| 1972-2-12 <sup>1</sup> / <sub>2</sub> | 179    | 72"    | 4x2     | 12 <sup>1</sup> / <sub>2</sub> | 100'   | 8            |

\*200' rolls available on request

## V-Mesh Fence

The choice of professionals when they care for their own horses. Unique, 2-inch and 4-inch mesh spread incorporates 12-1/2 gauge, 2-ply, twisted horizontal cables with 14 gauge looped cross wires that create a dense, protective fence. This is one tough fence and galvanized to stand up to years of use and abuse, from frisky foals and cantankerous mustangs, alike.

| Style | Height | Approx. Weight Per/Roll | Horizontal Wire Gauge          | Cross Wire Gauge | Length | Rolls per Pallet |
|-------|--------|-------------------------|--------------------------------|------------------|--------|------------------|
| I-2   | 42"    | 214                     | 12 <sup>1</sup> / <sub>2</sub> | 14               | 165'   | 4                |
| I-2   | 50"    | 256                     | 12 <sup>1</sup> / <sub>2</sub> | 14               | 165'   | 4                |
| I-2   | 58"    | 298                     | 12 <sup>1</sup> / <sub>2</sub> | 14               | 165'   | 4                |
| I-2   | 72"    | 361                     | 12 <sup>1</sup> / <sub>2</sub> | 14               | 165'   | 4                |


All horizontal wires are 2-ply cable.



## Deer & Rabbit Fence

The perfect fence for keeping large and small animals out of gardens, orchards, vineyards, etc. Heavy duty fence with stiff stay knot for durability.

| Style                                 | Weight | Height | Horz. Wire | Stay Spacing | Gauge                          | Length | Rolls/Pallet |
|---------------------------------------|--------|--------|------------|--------------|--------------------------------|--------|--------------|
| 2048-2-14 <sup>1</sup> / <sub>2</sub> | 85     | 48"    | 20         | 6            | 14 <sup>1</sup> / <sub>2</sub> | 165'   | 14           |
| 2360-2-14 <sup>1</sup> / <sub>2</sub> | 99     | 60"    | 23         | 6            | 14 <sup>1</sup> / <sub>2</sub> | 165'   | 14           |
| 2672-2-14 <sup>1</sup> / <sub>2</sub> | 114    | 72"    | 26         | 6            | 14 <sup>1</sup> / <sub>2</sub> | 165'   | 14           |

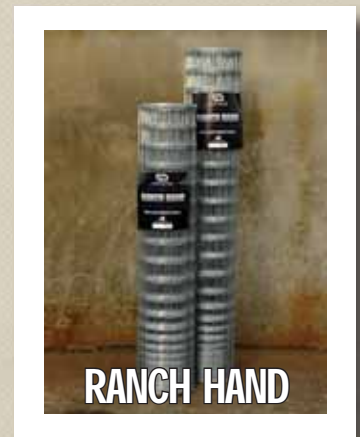

**RANCH HAND**

# Barbed & Barbless Wire / Fence Stays



Ranch Hand is available in 2 pt. 5", 4 pt. 5" and barbless and made of galvanized steel to endure the tests of time and weather.

Gold Brand Class III designates our premium quality wire. Gold Brand meets or exceeds all ASTM A121 specifications. It is also available in 2 pt., 4 pt., and barbless styles.

Galfan coated wire is manufactured to withstand the extreme conditions of climate and used where corrosion resistance is imperative. Galfan provides a longer corrosion life and lower cost per year of service life.

Barbless wire has a variety of uses from fencing in horses to putting tension wire at the bottom of our field fence. It is designed to enclose thinner skinned animals and do the job without the severity of barbed wire.

Whether its 2 point or 4 point barbed wire, the durability and strength will impress every user of our wire. Because we have some of the sharpest barbs in the industry, it is preferred by ranchers everywhere.

## Ranch Hand

| No. of Barbs | Barb Spacing | Approx. Wt. Per/Reel | Gauge | Length | Rolls per Pallet |
|--------------|--------------|----------------------|-------|--------|------------------|
| 2 pt.        | 5"           | 76                   | 12½   | 1320'  | 32               |
| 4 pt.        | 5"           | 83                   | 12½   | 1320'  | 27               |
| Barbless     | n/a          | 68                   | 12½   | 1320'  | 32               |

## Gold Brand & Galfan

| No. of Barbs | Barb Spacing | Approx. Wt. Per/Reel | Gauge | Length | Rolls per Pallet |
|--------------|--------------|----------------------|-------|--------|------------------|
| 2 pt.        | 4"           | 78                   | 12½   | 1320'  | 32               |
| 4 pt.        | 5"           | 85                   | 12½   | 1320'  | 27               |
| Barbless     | n/a          | 70                   | 12½   | 1320'  | 32               |

## DW Commercial

| No. of Barbs | Barb Spacing | Approx. Wt. Per/Reel | Gauge | Length | Rolls per Pallet |
|--------------|--------------|----------------------|-------|--------|------------------|
| 2 pt.        | 5"           | 62                   | 13    | 1320'  | 32               |



## Fence Stays

Fence Stays help maintain stability and uniformity in fencing when used with barbed and barbless wire or a combination of barbed wire and field fence. Available in Ranch Hand, Gold Brand or Galfan coatings.

| Length | Weight   | Quantity/Bundle | Gauge | Bdls/Pallet |
|--------|----------|-----------------|-------|-------------|
| 36"    | 35 / bdl | 100 / bdl       | 9.5   | 20          |
| 42"    | 41 / bdl | 100 / bdl       | 9.5   | 20          |
| 48"    | 47 / bdl | 100 / bdl       | 9.5   | 20          |

# Welded GP Fabric / Panels / Ornamental Fence

## Welded General Purpose Fabric

This galvanized welded fabric is a versatile product for all types of farm, home and industrial applications. Available in 50' and 100' lengths, 12-1/2 or 14 gauge.



| Mesh Space | Height | Weight | Gauge  | Length | Rolls/Pallet |
|------------|--------|--------|--------|--------|--------------|
| 4x2        | 36"    | 72     | 12 1/2 | 100'   | 8            |
| 4x2        | 48"    | 96     | 12 1/2 | 100'   | 8            |
| 4x2        | 60"    | 119    | 12 1/2 | 100'   | 8            |
| 4x2        | 72"    | 141    | 12 1/2 | 100'   | 8            |
| 4x2        | 36"    | 48     | 14     | 100'   | 9            |
| 4x2        | 48"    | 64     | 14     | 100'   | 9            |
| 4x2        | 60"    | 80     | 14     | 100'   | 9            |
| 4x2        | 72"    | 96     | 14     | 100'   | 9            |
| 4x2        | 36"    | 24     | 14     | 50'    | 14           |
| 4x2        | 48"    | 32     | 14     | 50'    | 14           |
| 4x2        | 60"    | 40     | 14     | 50'    | 14           |
| 4x2        | 72"    | 48     | 14     | 50'    | 14           |

## Welded Fence Panels

Davis Wire Welded Fence Panels are manufactured in a wide variety of horizontal spacing configurations. They are built to handle the roughest ranching conditions, but are versatile enough to be used for lawn and garden projects. Our panels are manufactured using the galvanized welding process, which provides a smooth finish to each line wire and eliminates sharp burrs which may cause injury to the animal or their owner. Whether used for cattle, swine, sheep goats, or horses, Davis Wire Welded Fence Panels are tough enough to handle any fencing requirements.



| Style                     | Height | Length | # of Lines | Weight |
|---------------------------|--------|--------|------------|--------|
| 1134-8 Hog Panel          | 34"    | 16'    | 11         | 33     |
| 1142-8 Sheep Panel        | 42"    | 16'    | 11         | 36     |
| 1052-8 Ranch Panel        | 52"    | 16'    | 10         | 36     |
| 1050-8 Ranch Panel        | 50"    | 16'    | 10         | 36     |
| 1352-8 Econo Panel        | 52"    | 16'    | 13         | 42     |
| 1350-8 Econo Panel        | 50"    | 16'    | 13         | 42     |
| 4x4 5'x 16' Utility Panel | 60"    | 16'    | 16         | 68     |
| 4x4 3'x 16' Utility Panel | 36"    | 16'    | 10         | 29     |

## Ornamental Fence, 100' Rolls

An old favorite, this CF&I Brand Class I galvanized wire fencing dresses up the yard or garden and helps keep out pests. Specification A-11 (Double Loop) fence has closely woven picket wires at the bottom, and double-loop wires that prevent climbing. Three heights, 36", 42" and 48", keep children, pets and ranch animals where they belong.



| CF & I Brand       | Picket Wire Gauge | Spacing Top/Btm      | Ht. | Wt./Roll | Rolls/Pallet |
|--------------------|-------------------|----------------------|-----|----------|--------------|
| Specification A-11 | 11 Gauge          | 2-7/8 x 1-3/8"       | 36" | 124 lbs. | 9            |
| Specification A-11 | 11 Gauge          | 2-7/8 x 1-3/8"       | 42" | 135 lbs. | 9            |
| Specification A-11 | 11 Gauge          | 2-7/8 x 1-3/8"       | 48" | 158 lbs. | 9            |
| Specification B-11 | 11 Gauge          | 2-7/8" entire length | 36" | 97 lbs.  | 9            |
| Specification B-11 | 11 Gauge          | 2-7/8" entire length | 42" | 108 lbs. | 9            |
| Specification B-11 | 11 Gauge          | 2-7/8" entire length | 48" | 122 lbs. | 9            |
| Flower Bed Border  | 11 Gauge          | 2-3/4"               | 16" | 49 lbs.  | 18           |
| Flower Bed Border  | 11 Gauge          | 2-3/4"               | 22" | 62 lbs.  | 16           |

# Vineyard, Trellis & Fence Wire / Baler Wire



## Hi-Tensile Vineyard, Trellis & Fence Wire

For wine as well as fruit orchards. Both standard (58,000 - 70,000 psi) and hi-tensile (170,000 psi) to choose from. Available in Type 1, Class III and Galvan coatings, 100# coils or 1500# stands, 12, 12-1/2, 13 and 14 gauge.

## Hi-Tensile Smooth Wire

Hi-tensile smooth wire provides an innovative choice for enclosing wide open spaces. Hi-tensile DW200 (200,000 psi) wire is ideally suited for electric fence. The Class III and Galvan coatings give years of extra service as well as a pleasant appearance. Available in 100 pound, 12-1/2 gauge, layer wound coils.

## Merchant Wire Coils

Merchant wire coils are ideal for all-purpose tying around the farm and home. Available in 9 to 16 gauge, annealed or galvanized coatings. Merchant wire is produced in 10 lb. and 50 lb. coils.

| Gauge                         | Decimal | Ft./Lb. | Gauge                         | Decimal | Ft./Lb. | Gauge                          | Decimal | Ft./Lb. | Gauge                          | Decimal | Ft./Lb. |
|-------------------------------|---------|---------|-------------------------------|---------|---------|--------------------------------|---------|---------|--------------------------------|---------|---------|
| 1                             | .283    | 4.681   | 5                             | .207    | 8.750   | 9                              | .1483   | 17.05   | 13                             | .0915   | 44.78   |
| 1 <sup>1</sup> / <sub>4</sub> | .278    | 4.851   | 5 <sup>1</sup> / <sub>4</sub> | .203    | 9.098   | 9 <sup>1</sup> / <sub>4</sub>  | .145    | 17.83   | 13 <sup>1</sup> / <sub>4</sub> | .089    | 47.33   |
| 1 <sup>1</sup> / <sub>2</sub> | .273    | 5.030   | 5 <sup>1</sup> / <sub>2</sub> | .200    | 9.373   | 9 <sup>1</sup> / <sub>2</sub>  | .142    | 18.57   | 13 <sup>1</sup> / <sub>2</sub> | .086    | 50.59   |
| 1 <sup>3</sup> / <sub>4</sub> | .268    | 5.220   | 5 <sup>3</sup> / <sub>4</sub> | .196    | 9.759   | 9 <sup>3</sup> / <sub>4</sub>  | .138    | 19.69   | 13 <sup>3</sup> / <sub>4</sub> | .083    | 54.42   |
| 2                             | .2625   | 5.441   | 6                             | .192    | 10.17   | 10                             | .135    | 20.57   | 14                             | .080    | 58.58   |
| 2 <sup>1</sup> / <sub>4</sub> | .258    | 5.632   | 6 <sup>1</sup> / <sub>4</sub> | .188    | 10.81   | 10 <sup>1</sup> / <sub>4</sub> | .131    | 21.85   | 14 <sup>1</sup> / <sub>4</sub> | .078    | 61.62   |
| 2 <sup>1</sup> / <sub>2</sub> | .253    | 5.857   | 6 <sup>1</sup> / <sub>2</sub> | .185    | 10.95   | 10 <sup>1</sup> / <sub>2</sub> | .128    | 22.88   | 14 <sup>1</sup> / <sub>2</sub> | .076    | 64.91   |
| 2 <sup>3</sup> / <sub>4</sub> | .248    | 6.096   | 6 <sup>3</sup> / <sub>4</sub> | .181    | 11.44   | 10 <sup>3</sup> / <sub>4</sub> | .124    | 24.38   | 14 <sup>3</sup> / <sub>4</sub> | .074    | 68.46   |
| 3                             | .2437   | 6.313   | 7                             | .177    | 11.97   | 11                             | .1205   | 25.82   | 15                             | .072    | 72.32   |
| 3 <sup>1</sup> / <sub>4</sub> | .239    | 6.563   | 7 <sup>1</sup> / <sub>4</sub> | .173    | 12.53   | 11 <sup>1</sup> / <sub>4</sub> | .117    | 27.39   | 15 <sup>1</sup> / <sub>4</sub> | .070    | 76.51   |
| 3 <sup>1</sup> / <sub>2</sub> | .235    | 6.789   | 7 <sup>1</sup> / <sub>2</sub> | .170    | 12.97   | 11 <sup>1</sup> / <sub>2</sub> | .113    | 29.36   | 15 <sup>1</sup> / <sub>2</sub> | .067    | 83.52   |
| 3 <sup>3</sup> / <sub>4</sub> | .230    | 7.087   | 7 <sup>3</sup> / <sub>4</sub> | .166    | 13.61   | 11 <sup>3</sup> / <sub>4</sub> | .109    | 31.55   | 15 <sup>3</sup> / <sub>4</sub> | .065    | 88.73   |
| 4                             | .2253   | 7.386   | 8                             | .162    | 14.29   | 12                             | .1055   | 33.69   | 16                             | .0625   | 95.98   |
| 4 <sup>1</sup> / <sub>4</sub> | .221    | 7.676   | 8 <sup>1</sup> / <sub>4</sub> | .159    | 14.83   | 12 <sup>1</sup> / <sub>4</sub> | .102    | 36.03   | 16 <sup>1</sup> / <sub>4</sub> | .060    | 104.1   |
| 4 <sup>1</sup> / <sub>2</sub> | .216    | 8.035   | 8 <sup>1</sup> / <sub>2</sub> | .155    | 15.60   | 12 <sup>1</sup> / <sub>2</sub> | .099    | 38.25   | 16 <sup>1</sup> / <sub>2</sub> | .058    | 111.4   |
| 4 <sup>3</sup> / <sub>4</sub> | .212    | 8.341   | 8 <sup>3</sup> / <sub>4</sub> | .152    | 16.23   | 12 <sup>3</sup> / <sub>4</sub> | .095    | 41.54   | 16 <sup>3</sup> / <sub>4</sub> | .056    | 119.8   |



## Baler Wire Cartons

Davis Wire Baler Wire is made from a special grade of high quality steel. The closely controlled annealing process assures consistent break and elongation qualities that provide for production of maximum weight hay bales. The combination of uniform layer wound coiling and the application of special lubricant provides a tangle-free, rust-resistant package. The coils are securely fastened with nylon tape and placed in a water-resistant carton with perforated center knock-out for easy dispensing.

Specification: Meets ASAE Standard Specs, No. 6500 Coil

Wire Gauge: 14-1/2      Inside Diameter: 8"      Length: 6500 ft.  
 Width: 6"      Outside Diameter: 13"      Packaging: 36 cartons/pallet

# Fence & Acreage Guides

## How to read field fence specifications



Example: 1047-6-12<sup>1</sup>/<sub>2</sub>

10 = No. of line wires

47 = Height in inches

6 = Spacing between vertical stay wires in inches

12<sup>1</sup>/<sub>2</sub> = Wire gauge

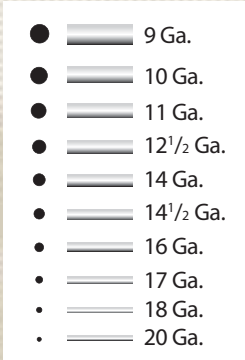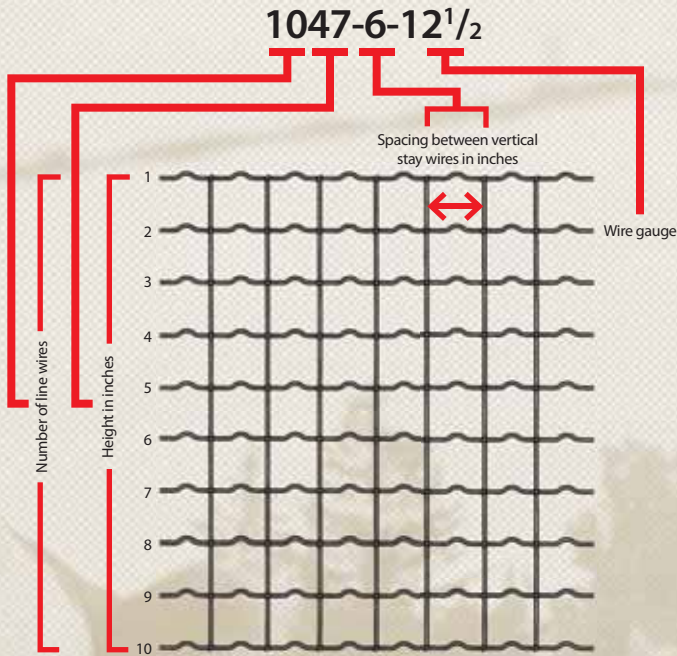

### Wire Gauge

Fencing is made from various gauges of wire - from very heavy to very light. The chart shows you the size of each gauge (Ga.) wire. The larger the number, the smaller the wire.

### Acreage Guide

Use this diagram to calculate the number of rods of fence required to enclose fields of different sizes.

1/4 mile = 1,320 ft. or 80 rods


1 rod = 16<sup>1</sup>/<sub>2</sub> ft.

1/2 mile = 2,640 ft. or 160 rods

10 rods = 165 ft.

1 mile = 5,280 ft. or 320 rods

20 rods = 330 ft.

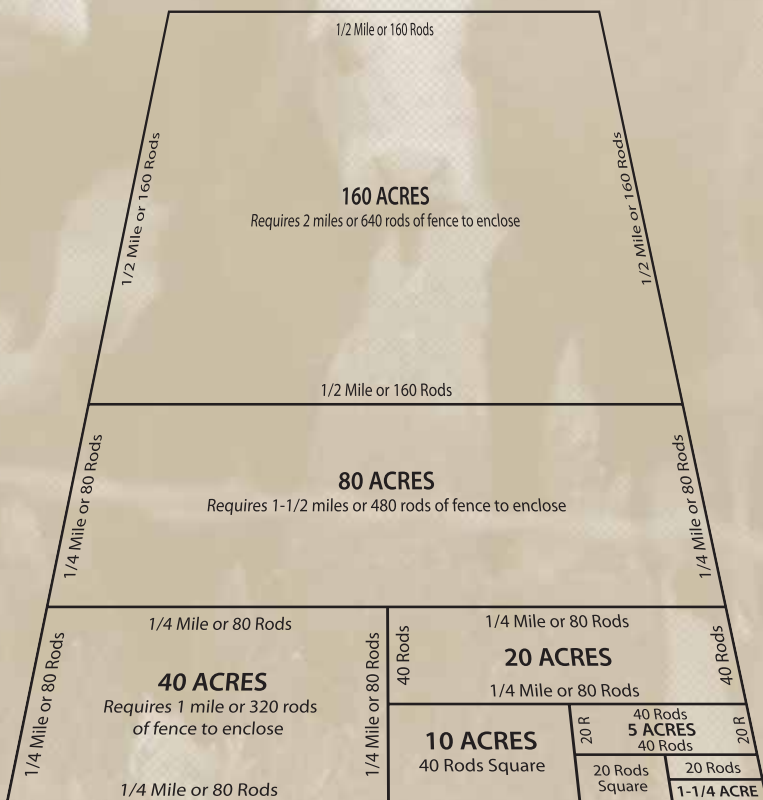

### Acreage Table

| Acres | Barb Wire          |                     |                 | Acres | Barb Wire          |                     |                 |
|-------|--------------------|---------------------|-----------------|-------|--------------------|---------------------|-----------------|
|       | Fence 20 Rod Rolls | Fence 100 Ft. Rolls | 80 Rod 1 Strand |       | Fence 20 Rod Rolls | Fence 100 Ft. Rolls | 80 Rod 1 Strand |
| 1     | 3                  | 9                   | 1               | 65    | 21                 | 68                  | 6               |
| 2     | 4                  | 12                  | 1               | 70    | 22                 | 70                  | 6               |
| 3     | 5                  | 15                  | 1               | 75    | 22                 | 73                  | 6               |
| 4     | 5                  | 17                  | 2               | 80    | 23                 | 75                  | 6               |
| 5     | 6                  | 19                  | 2               | 85    | 24                 | 77                  | 6               |
| 6     | 7                  | 21                  | 2               | 90    | 24                 | 80                  | 6               |
| 7     | 7                  | 22                  | 2               | 95    | 25                 | 82                  | 7               |
| 8     | 8                  | 24                  | 2               | 100   | 26                 | 84                  | 7               |
| 9     | 8                  | 25                  | 2               | 105   | 26                 | 86                  | 7               |
| 10    | 8                  | 26                  | 2               | 110   | 27                 | 88                  | 7               |
| 11    | 8                  | 28                  | 2               | 115   | 28                 | 90                  | 7               |
| 12    | 9                  | 29                  | 3               | 120   | 28                 | 92                  | 7               |
| 13    | 10                 | 31                  | 3               | 125   | 28                 | 94                  | 7               |
| 14    | 10                 | 31                  | 3               | 150   | 31                 | 103                 | 8               |
| 15    | 10                 | 33                  | 3               | 175   | 34                 | 111                 | 8               |
| 16    | 11                 | 34                  | 3               | 200   | 36                 | 118                 | 9               |
| 17    | 11                 | 35                  | 3               | 225   | 38                 | 126                 | 10              |
| 18    | 11                 | 36                  | 3               | 250   | 40                 | 132                 | 10              |
| 19    | 11                 | 37                  | 3               | 275   | 42                 | 139                 | 11              |
| 20    | 12                 | 38                  | 3               | 300   | 44                 | 145                 | 11              |
| 25    | 13                 | 42                  | 4               | 325   | 46                 | 151                 | 12              |
| 30    | 14                 | 46                  | 4               | 350   | 48                 | 157                 | 12              |
| 35    | 15                 | 50                  | 4               | 375   | 49                 | 162                 | 13              |
| 40    | 16                 | 53                  | 4               | 400   | 51                 | 167                 | 13              |
| 45    | 17                 | 56                  | 5               | 425   | 53                 | 173                 | 13              |
| 50    | 18                 | 60                  | 5               | 450   | 54                 | 177                 | 14              |
| 55    | 19                 | 62                  | 5               | 475   | 56                 | 182                 | 14              |
| 60    | 20                 | 65                  | 5               |       |                    |                     |                 |

Acreage Guide and Table are suggested guidelines only.



**Davis Wire Corporation** offers the **Ranch Hand Brand** and **Silverado** as standard product lines. This top quality line of products is priced at competitive levels in the marketplace. These fencing products are available to service most of your agricultural or lawn and garden applications. Although the **Ranch Hand** and **Silverado** labels denote the basic and most significant portion of our product line, we offer additional higher qualities to meet your specific needs.

The **Gold Brand** label designates a class 3 zinc coating. **Gold Brand** meets ASTM specifications for certified fence projects.

**Galfan** would be used for applications that require maximum corrosion protection. **Galfan** is a 95% zinc/5% aluminum mischmetal alloy. **Galfan** provides a longer corrosion life and a lower cost per year of service life.



**DAVIS WIRE**  
CORPORATION

QUALITY AGRICULTURAL  
WIRE PRODUCTS

19411 80TH AVE. S.  
KENT, WA 98032  
800.872.8920

5555 N. IRWINDALE AVE.  
IRWINDALE, CA 91706  
800.350.7851